


Kwik Lite

Features

- INSTANT START
- LESS POWER MORE LIGHT
- POWER SAVING – 25%
- INCREASED LAMP LIFE
- WORKS FROM 165V - 265V
- ANALOG DIMMING BY 1 – 10V DC
- FLICKER FREE
- FOR FTL's AND CFL's

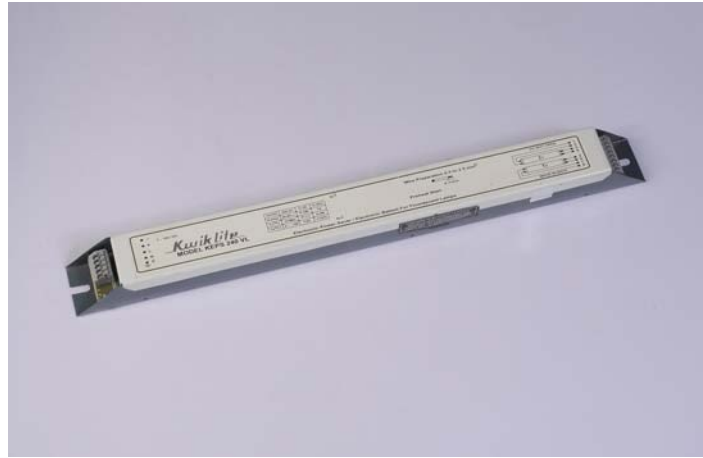

Technical Specifications

Model	KEPS 240 VL
Lamp Wattage	2 x 32 HF, 36, 40
Power Consumption	76 Watts
Mains Current	0.32 Amps
Power Factor	0.99
Ballast Loss	3W (Approx.)
Supply	240V AC & DC
Functioning at low temp.	minus 10 deg. C
Noise Level	NIL
Stroboscopic effect	Absent
Protection	Built-in fuse Short Circuit Protected
Starter on fitting	Not required
Temperature rise	15-20 deg. C above ambient
Crest Factor	< 1.7
THD	< 10%
Operating Frequency	greater than 25 KHz.
Dimensions	385x35x28 mm
Weight	Approx.425 gms

Kwiklite Model No : KEPS 240 VL

Clients for KEPS 240 VL

- **Bharat Earth Movers Ltd**
- **Granuel India**
- **Priya Cement**
- **NMDC**
- **Kesoram Cement**
- **Dr. Reddy's Laboratories**
- **Singareni Collieries Comp Ltd.,**
- **Dept. Of Space**
- **Taj Group of Hotels**
- **Mahindra Satyam**
- **Indian Oil Corporation**
- **K-Lite Industries**
- **Wheels India Ltd**
- **Integral Coach Factory**
- **BDL**
- **CMC , Vellore**

..... and more

Contact us at : Premier Combines, Plot No.4 Mohammad Hussain Colony, Kolathur, Chennai – 600099.
Ph.No.: 044-26510195, Telefax No.:044-26510805 Visit us at: www.kwiklite.com Email: kwiklite@vsnl.com.