

Kwik Lite

Features

- SAVES ENERGY UPTO 60%
- CONSTANT ILLUMINATION OVER A WIDE RANGE (95 – 270V)
- ALUMINUM CASING FOR HEAT DISSIPATION
- AVAILABLE IN COOL WHITE (5700K – 6500K) AND WARM WHITE (2700K – 3000K)
- LIGHT WEIGHT

Technical Specifications

Model	KLSTL60
Fixture Type	IP 65
Power Supply	In-Built
LED Wattage	60W
Power Consumption	<67 Watts (app.)
Ballast Loss	6 - 7W (Approx.)
Supply	240V AC & DC
Functioning at low temp.	-10° C
Noise Level	NIL
Protection	Built-in fuse Short Circuit Protected Overload shut down Overvoltage cut-off
Temperature rise	10-15° C above ambient
Dimensions	200x450mm Approx.



**Kwiklite Model No: KLSTL60
Street Light Fixture**

Contact us at : Premier Combines, Plot No.4 Mohammad Hussain Colony, Kolathur, Chennai – 600099.
Tele/Fax No.: 044-26510195. Visit us at: www.kwiklite.com Email: kwiklite@vsnl.com.

Kwik Lite

Features

- SAVES ENERGY UPTO 60%
- CONSTANT ILLUMINATION OVER A WIDE RANGE (95 – 270V)
- ALUMINUM CASING FOR HEAT DISSIPATION
- AVAILABLE IN COOL WHITE (5700K – 6500K) AND WARM WHITE (2700K – 3000K)
- LIGHT WEIGHT

Technical Specifications

Model	KLSTL50
Fixture Type	IP 65
Power Supply	In-Built
LED Wattage	50W
Power Consumption	<57 Watts (app.)
Ballast Loss	6- 7W (Approx.)
Supply	240V AC & DC
Functioning at low temp.	-10° C
Noise Level	NIL
Protection	Built-in fuse Short Circuit Protected Overload shut down Over voltage cut-off
Temperature rise	10-15° C above ambient
Warranty	24 Months
Dimensions	200x 450mm Approx.



**Kwiklite Model No: KLSTL50
Street Light Fixture**

Contact us at : Premier Combines, Plot No.4 Mohammad Hussain Colony, Kolathur, Chennai – 600099.
Tele/Fax No.: 044-26510195. Visit us at: www.kwiklite.com Email: kwiklite@vsnl.com.


Kwik Lite

Features

- SAVES ENERGY UPTO 60%
- CONSTANT ILLUMINATION OVER A WIDE RANGE (95 – 270V)
- ALUMINUM CASING FOR HEAT DISSIPATION
- AVAILABLE IN COOL WHITE (5700K – 6500K) AND WARM WHITE (2700K – 3000K)
- LIGHT WEIGHT

Technical Specifications

Model	KLSTL40
Fixture Type	IP 65
Power Supply	In-Built
LED Wattage	40W
Power Consumption	<46 Watts (app.)
Ballast Loss	5 - 6W (Approx.)
Supply	240V AC & DC
Functioning at low temp.	-10° C
Noise Level	NIL
Protection	Built-in fuse Short Circuit Protected Overload shut down Overvoltage cut-off
Temperature rise	10-15° C above ambient
Dimensions	200x450mm Approx.

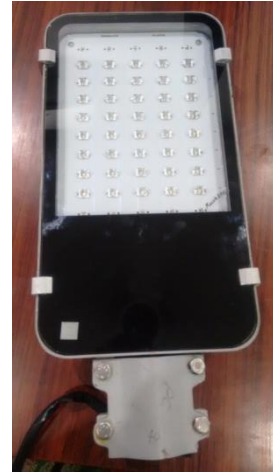

**Kwiklite Model No: KLSTL40
Street Light Fixture**

Contact us at : Premier Combines, Plot No.4 Mohammad Hussain Colony, Kolathur, Chennai – 600099.
Tele/Fax No.: 044-26510195. Visit us at: www.kwiklite.com Email: kwiklite@vsnl.com.